



Article number: 70630205

LIGHT TECHNOLOGY

LED	SMD linear
Light colour	840
Luminous flux	6000 lm
System power	42 W
Luminaire Efficiency	143 lm/W
Reflector	BatWing
Beam angle	2 x 20°
System power Luminaire Efficiency Reflector	42 W 143 lm/W BatWing

3.2 kg

white


IP 40.I

LUMINAIRE

Weight Protection rating . class Luminaire colour

OPTIONEEL

Mounting Accessories

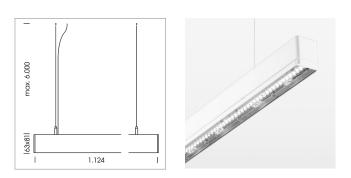

Light band with LED, rated life of the LED L80/B50 > 50000 h, colour rendering index CRI > 80, reflector with double asymmetrical light distribution pattern, lens optics made of PMMA, luminaire insert sheet steel, powder-coated, white

driver unit: 220-240 V~ / 50-60 Hz, max. 24 luminaires per circuit (B16A fuse)

Note: All data are typical values. System features may change with product improvements due to technical advances. Errors excepted.

