

# Ontero TX

Article number: 21420008


## LIGHT TECHNOLOGY

LED	SMD-Board
Light colour	835
Luminous flux	5730 - 10110 lm
System power	38 W - 72 W
Luminaire Efficiency	151 lm/W - 140 lm/W
Reflector	Xtra WideFlood
Beam angle	90°

## LUMINAIRE

Rotation angle	330°
Weight	3.1 kg
Protection rating . class	IP20 . I
Luminaire colour	matt silver

## OPTIONAL

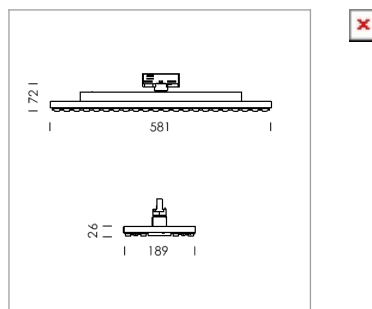

Surface-mounted luminaire with LED, rated life of the LED L80/B50 > 50000 h, colour rendering index CRI > 80, chromaticity tolerance 3 SDCM (initial), double asymmetrical light distribution pattern, TIR-lens made of PMMA, Driver with power selection via DIP switch, 8 possible levels: 38 W (5560 lm), 42 W (6100 lm), 47 W (6660 lm), 52 W (7240 lm), 57 W (7810 lm), 62 W (8340 lm), 67 W (8900 lm), 72 W (9440 lm), Leistung voreingestellt auf 62 W, rotation angle 330°, luminaire housing sheet steel, powder-coated, matt silver,

inclusiv driver unit: 220-240 V~ / 50-60 Hz, DALI, max. 15 luminaires per circuit (B16A fuse), temperature protection

Note: All data are typical values. System features may change with product improvements due to technical advances. Errors excepted.

