

## Intara CX

Article number: 51350005

### LIGHT TECHNOLOGY

|                      |            |
|----------------------|------------|
| LED                  | COB        |
| Light colour         | BeColor    |
| Luminous flux        | 1000 lm    |
| System power         | 15 W       |
| Luminaire Efficiency | 67 lm/W    |
| Reflector            | NarrowSpot |
| Beam angle           | 10°        |

### LUMINAIRE

|                           |             |
|---------------------------|-------------|
| Rotation angle            | 350°        |
| Swivel angle              | +30° / -30° |
| Weight                    | 0.72 kg     |
| Protection rating . class | IP20 . III  |
| Luminaire colour          | black       |

### OPTIONEEL

RAL-colours, NCS-colours (powder coating or wet spraying) on inquiry, surface alloys on inquiry, honeycomb louver




Recessed directional spot with LED, rated life of the LED L80/B10 > 50000 h, colour rendering index CRI > 95, chromaticity tolerance 2 SDCM (initial), LED hybrid technology, 3D silicone lens to reduce the proportion of scattered light, rotation-symmetrical reflector with circular light distribution pattern, reflector pure aluminium 99,99% in MIRO-Silver®, segmented and faceted, exchangeable reflector unit in high-sheen black plastic, with glass cover, luminaire head designed as heat sink die-cast aluminium, black anodized, rotation angle 350°, swivel angle +30°/-30°, assembly ring die-cast aluminum, front ring and trim in plastic, plastic clamp spring for ceiling attachment, black, separate driver unit

76500101 driver unit, Fix Current, IP54,  
220-240 V / 50-60 Hz, 400 mA, camera-compatible, up to 2.5 KV interference resistance, SELV, max. 34 luminaires per circuit (B16A fuse)

76500105 driver unit, DALI, IP54,  
220-240 V / 50-60 Hz, 400 mA, camera-compatible, up to 2.5 KV interference resistance, SELV, max. 24 luminaires per circuit (B16A fuse)

76500050 driver unit, Fix Current,  
220-240 V / 50-60 Hz, 400 mA, camera-compatible, up to 2.5 KV interference resistance, SELV, max. 34 luminaires per circuit (B16A fuse)

76500051 driver unit, DALI,  
220-240 V / 50-60 Hz, 400 mA, with GST18/5-pin connector, incl. 5-conductor feed-through wiring, camera-compatible, up to 2.5 KV interference resistance, SELV, max. 24 luminaires per circuit (B16A fuse)

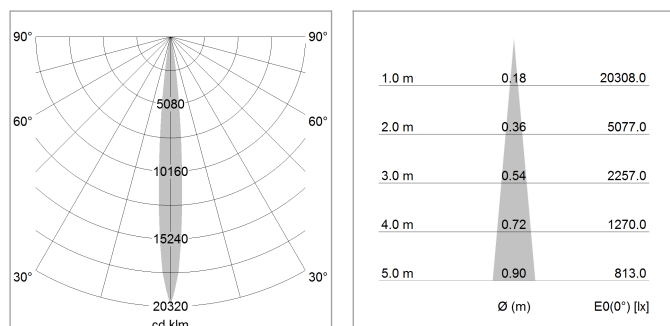

Note: All data are typical values. System features may change with product improvements due to technical advances. Errors excepted.

