

# Ontero TX


Article number: 21370008

## LIGHT TECHNOLOGY

|                      |                      |
|----------------------|----------------------|
| LED                  | SMD-Board            |
| Light colour         | 835                  |
| Luminous flux        | 5920 - 10450 lm      |
| System power         | 38 W - 72 W          |
| Luminaire Efficiency | 156 lm/W - 145 lm/W  |
| Reflector            | doppelt asymmetrisch |
| Beam angle           | 2 x 20°              |

## LUMINAIRE

|                           |             |
|---------------------------|-------------|
| Rotation angle            | 330°        |
| Weight                    | 3.1 kg      |
| Protection rating . class | IP 20 . I   |
| Luminaire colour          | matt silver |

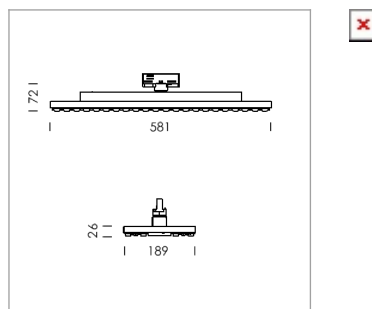

Surface-mounted luminaire with LED, rated life of the LED L80/B50 > 50000 h, colour rendering index CRI > 80, chromaticity tolerance 3 SDCM (initial), double asymmetrical light distribution pattern, lens made of PMMA, Driver with power selection via DIP switch, 8 possible levels: 38 W (5680 lm), 42 W (6300 lm), 47 W (6880 lm), 52 W (7480 lm), 57 W (8070 lm), 62 W (8620 lm), 67 W (9190lm), 72 W (9750 lm), 62 Watt preselected, rotation angle 330°, luminaire housing sheet steel, powder-coated, matt silver,

Multiadapter black, inclusive driver unit: 220-240 V~ / 50-60 Hz, max. 24 luminaires per circuit (B16A fuse), DIP-Switch 38W-72W (default 53W), temperature protection

Note: All data are typical values. System features may change with product improvements due to technical advances. Errors excepted.

