



Article number: 70630222

## LIGHT TECHNOLOGY

| LED                  | SMD linear |
|----------------------|------------|
| Light colour         | 840        |
| Luminous flux        | 9000 lm    |
| System power         | 63 W       |
| Luminaire Efficiency | 143 lm/W   |
| Reflector            | BatWing    |
| Beam angle           | 2 x 20°    |

3.2 kg

white


IP 40.I

## LUMINAIRE

Weight Protection rating . class Luminaire colour

## OPTIONEEL

Mounting Accessories

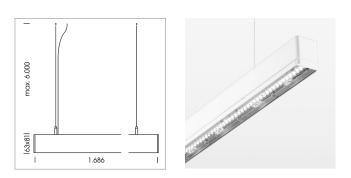

Light band with LED, rated life of the LED L80/B50 > 50000 h, colour rendering index CRI > 80, reflector with double asymmetrical light distribution pattern, lens optics made of PMMA, luminaire insert sheet steel, powder-coated, white

driver unit: 220-240 V~ / 50-60 Hz, max. 24 luminaires per circuit (B16A fuse)

Note: All data are typical values. System features may change with product improvements due to technical advances. Errors excepted.

